


STAINLESS STEEL PIPE
CLAMPS AS SPECIFIED.

1/2" EXPANSION
ANCHORS

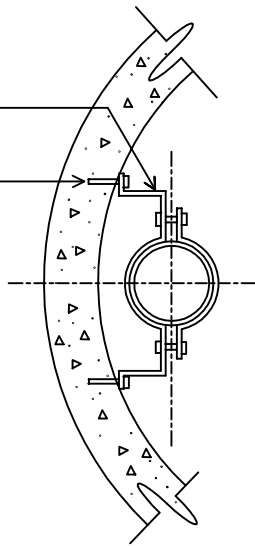

SECTION C-C

P.V.C. TEE

PIPE CONNECTION PER
DPW SPECIFICATIONS

INFLUENT PIPE

REMOVEABLE
PLUG

P.V.C. DROP PIPE
(SAME DIAMETER AS
INFLUENT PIPE)

SECURE TO WALL SEE
DETAIL SECTION C-C.

PIPE ANCHOR
4'-0" O.C.

BRICK LINED CHANNEL

EFFLUENT PIPE

90° BELL & SPIGOT
ELBOW.

UNDISTURBED EARTH

12" MINIMUM
SCREENED GRAVEL.

NOTE:

MINIMUM 5'-0" INSIDE DIA. MANHOLES SHALL
BE USED AT ALL DROP MANHOLE CONNECTIONS

SANITARY SEWER
PVC DROP CONNECTION (INTERNAL)
N.T.S.